

APE

best for you

CALACATTA BORGHINI MATT RECT 120X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034054	120X120	10,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

APE

best for you

CALACATTA BORGHINI POL RECT 120X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034053	120X120	10,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

APE

best for you

CALACATTA BORGHINI C2 RECT 120X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036786	120X120	11,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000
Slip resistance (DCOF)	ANSI A137,1	0.56

CALACATTA BORGHINI MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034185	60x120	10,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

CALACATTA BORGHINI POL RECT

60X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034186	60x120	10,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

CALACATTA BORGHINI C2 RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036787	60x120	10,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000
Slip resistance (DCOF)	ANSI A137,1	0.56

APE

best for you

CALACATTA BORGHINI MATT RECT 60X60

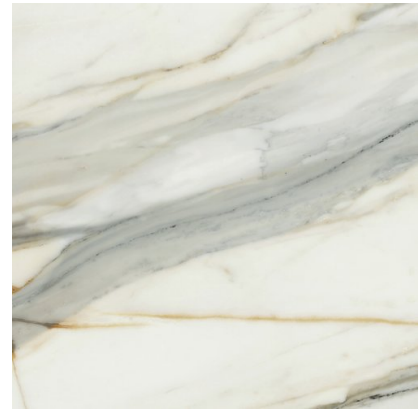

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034348	60X60	9,80	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

APE

best for you

CALACATTA BORGHINI POL RECT

60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034349	60X60	10,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

APE

best for you

CALACATTA BORGHINI C2 RECT

60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036788	60X60	11,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000
Slip resistance (DCOF)	ANSI A137,1	0.56

CALACATTA BORGHINI MATT RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035228	30X60	9,90	PC BIA GL

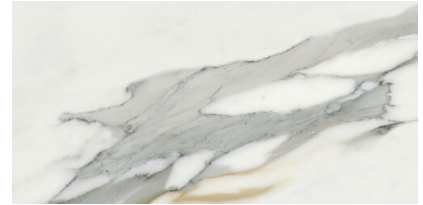

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

CALACATTA BORGHINI POL RECT

30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035227	30X60	9,60	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
----------------------	------------------	------------------------

CALACATTA BORGHINI C2 RECT

30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036789	30X60	9,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GA
Resistance to alcalis	EN ISO 10545-13	GA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000
Slip resistance (DCOF)	ANSI A137,1	0.56

APE

best for you

DECOR SET(2) SAUVAGE POL

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035035	60x120	10,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

ROD. CALACATTA BORGHINI MATT

7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037583	7,5x60	10,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcais	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ROD. CALACATTA BORGHINI

POLISHED 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037053	7,5x60	0,00	PAVIMENTO



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000