



## BURLINGTON PEARL RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037738</b>	75X75	9,00	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

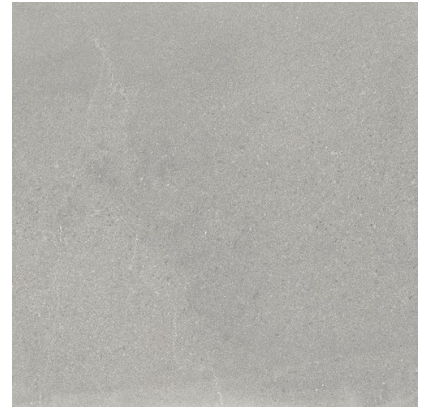

## BURLINGTON GREY RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037740</b>	75X75	9,90	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

# APE

best for you

## BURLINGTON VOLCANO RECT 75X75

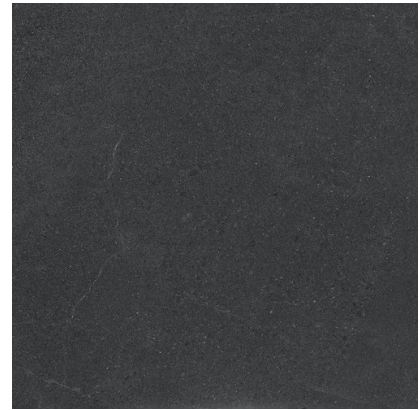

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037746</b>	75X75	9,10	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## ANTI-SLIP BURLINGTON PEARL

### RECT 75X75



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037739</b>	75X75	10,00	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test


#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## ANTI-SLIP BURLINGTON GREY RECT 75X75

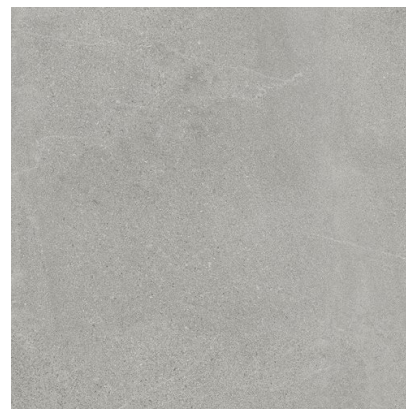

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037741</b>	75X75	10,40	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

# APE

best for you

## ANTI-SLIP BURLINGTON VOLCANO RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038132</b>	75X75	10,00	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## BURLINGTON PEARL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037729</b>	60x120	9,10	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON GREY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037731</b>	60x120	10,50	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000



## BURLINGTON VOLCANO RECT

### 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037737</b>	60x120	8,50	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## ANTI-SLIP BURLINGTON PEARL

### RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037730</b>	60x120	9,20	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## ANTI-SLIP BURLINGTON GREY RECT 60X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037732</b>	60x120	11,30	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## ANTI-SLIP BURLINGTON VOLCANO

### RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038131</b>	60x120	10,80	PC BIA GL

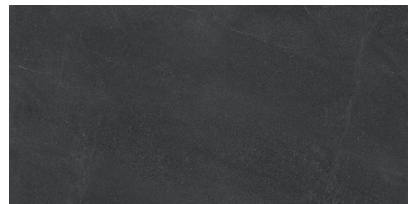

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

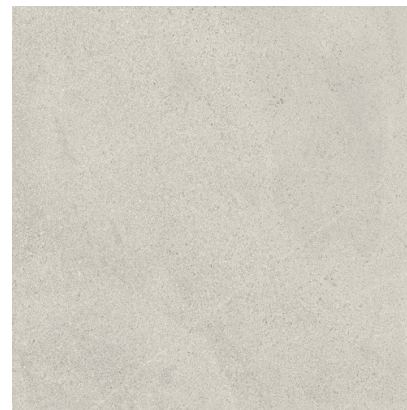

## BURLINGTON PEARL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037720</b>	60X60	8,90	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000



## BURLINGTON GREY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037722</b>	60X60	8,90	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON VOLCANO RECT

### 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037728</b>	60X60	8,70	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## PELDAÑO RECTO ANT. C3

### BURLINGTON PEARL 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038135</b>	33x120	32,40	EXTRUSI

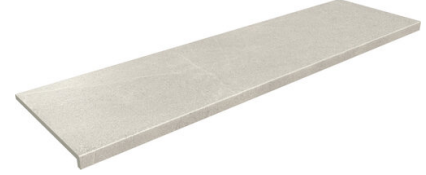

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11
Slip resistance (barefeet)	DIN 51097	C



## PELDAÑO RECTO ANT. C3 BURLINGTON GREY 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038133</b>	33x120	31,90	EXTRUSI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11
Slip resistance (barefeet)	DIN 51097	C

## PELDAÑO RECTO ANT. C3

### BURLINGTON VOLCANO 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038137</b>	33x120	32,10	EXTRUSI



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11
Slip resistance (barefeet)	DIN 51097	C

## BURLINGTON PEARL RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037893</b>	30X90	8,50	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON GREY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037894</b>	30X90	8,70	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## DECOR BURLINGTON PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037883</b>	30X90	9,60	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR BURLINGTON GREY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037884</b>	30X90	9,50	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## CUMBRIAN VOLCANO RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037882</b>	30X90	10,60	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 10 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## EDEN PEARL RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037907</b>	30X90	10,60	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 10 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000



## EDEN GREY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037908</b>	30X90	11,00	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 10 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## EDEN IVORY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037909</b>	30X90	11,50	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 10 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## DECOR DURHAM I PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037876</b>	30X90	9,10	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM II PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038043</b>	30X90	9,10	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM III PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038044</b>	30X90	9,10	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES


# APE

best for you

## ZANQUIN RECTO BURLINGTON

### PEARL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039451</b>	7,5x60	9,00	PC BIA GL

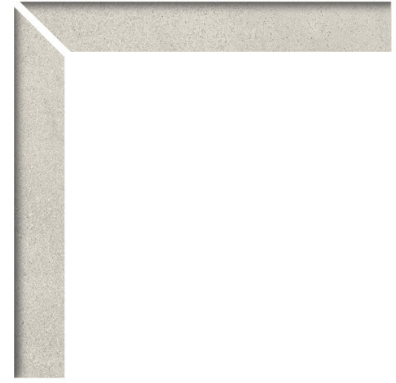


#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
---------------------	-----------------	------------------------

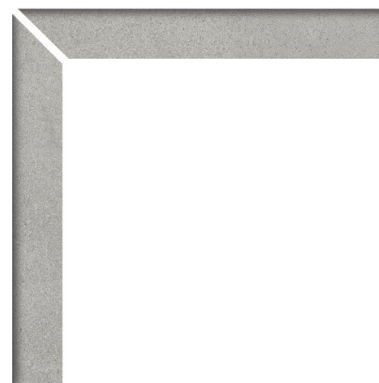

## ZANQUIN RECTO BURLINGTON

### GREY 7,5X60


REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039449</b>	7,5x60	0,00	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

#### CHEMICAL PROPERTIES

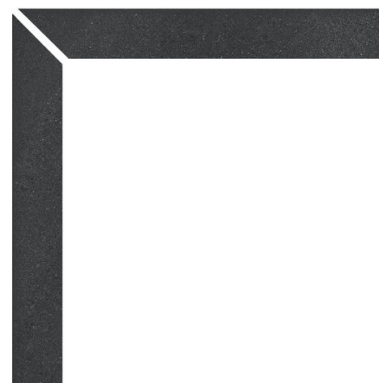

## ZANQUIN RECTO BURLINGTON

### VOLCANO 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039453</b>	7,5x60	0,00	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Frost resistance EN ISO 10545-12 It stands the test

#### CHEMICAL PROPERTIES





## BURLINGTON IVORY RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037742</b>	75X75	10,50	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000



## BURLINGTON TAUPE RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037744</b>	75X75	10,50	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

# APE

best for you

## ANTI-SLIP BURLINGTON IVORY

### RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037743</b>	75X75	10,00	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## ANTI-SLIP BURLINGTON TAUPE

### RECT 75X75



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037745</b>	75X75	10,00	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## BURLINGTON IVORY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037733</b>	60x120	8,90	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON TAUPE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037735</b>	60x120	8,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## ANTI-SLIP BURLINGTON IVORY

### RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037734</b>	60x120	8,90	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11

## ANTI-SLIP BURLINGTON TAUPE

### RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037736</b>	60x120	10,80	PC BIA GL



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11





## BURLINGTON IVORY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037724</b>	60X60	9,30	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000



## BURLINGTON TAUPE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037726</b>	60X60	9,70	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## PELDAÑO RECTO ANT. C3 BURLINGTON IVORY 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038134</b>	33x120	32,10	EXTRUSI

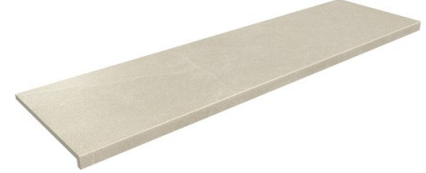

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11
Slip resistance (barefeet)	DIN 51097	C

## PELDAÑO RECTO ANT. C3

### BURLINGTON TAUPE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038136</b>	33x120	30,00	EXTRUSI



#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 3
Slip resistance (R)	DIN 51130	R11
Slip resistance (barefeet)	DIN 51097	C

## BURLINGTON IVORY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037895</b>	30X90	8,70	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## DECOR BURLINGTON IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037885</b>	30X90	9,60	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## CUMBRIAN TAUPE RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037881</b>	30X90	10,50	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 10 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	0.00000000000000000000
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	0.00000000000000000000
Slip resistance (R)	DIN 51130	0.00000000000000000000

## DECOR DURHAM I IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A037877</b>	30X90	9,70	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES



## DECOR DURHAM II IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038045</b>	30X90	9,60	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM III IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038046</b>	30X90	9,60	REVESTI



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## BURLINGTON PEARL RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038205</b>	30X60	8,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON GREY RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038206</b>	30X60	96,90	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON VOLCANO RECT

### 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038209</b>	30X60	9,90	PC BIA GL

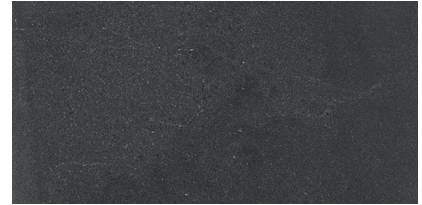

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON IVORY RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038207</b>	30X60	9,30	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## BURLINGTON TAUPE RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038208</b>	30X60	9,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm <sup>2</sup>
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-41901:2017EX	Class 2
Slip resistance (R)	DIN 51130	0.00000000000000000000

## ROD. BURLINGTON PEARL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038375</b>	7,5x60	9,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000



## ROD. BURLINGTON GREY 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038371</b>	7,5X75	8,70	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON VOLCANO

### 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038374</b>	7,5X75	8,70	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcais	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON PEARL 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038370</b>	7,5X75	8,70	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON GREY 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038376</b>	7,5x60	9,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON VOLCANO

### 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038379</b>	7,5x60	9,70	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcais	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON IVORY 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038372</b>	7,5X75	8,70	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON TAUPE 7,5X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038373</b>	7,5X75	11,20	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

## ROD. BURLINGTON IVORY 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038377</b>	7,5x60	9,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	
0.00000000000000000000 <sup>2</sup>		
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000



## ROD. BURLINGTON TAUPE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A038378</b>	7,5x60	9,80	PC BIA GL



### DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Cracking resistance	EN ISO 10545-11	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alcalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

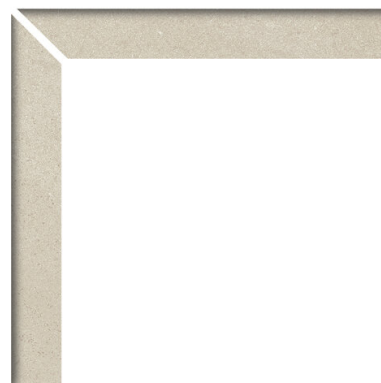

## ZANQUIN RECTO BURLINGTON IVORY 7,5X60


REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039450</b>	7,5x60	9,10	PC BIA GL

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

### CHEMICAL PROPERTIES

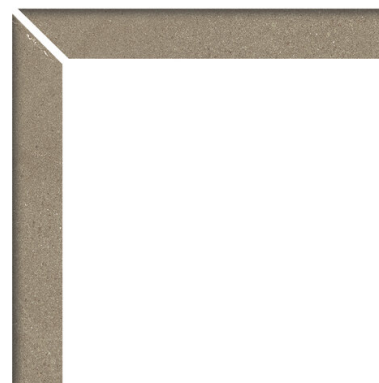

## ZANQUIN RECTO BURLINGTON

### TAUPE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039452</b>	7,5x60	0,00	PC BIA GL

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

#### CHEMICAL PROPERTIES