

EPOCA WHITE POL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038077	60X60	8,80	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5



EPOCA BONE POL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038078	60X60	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

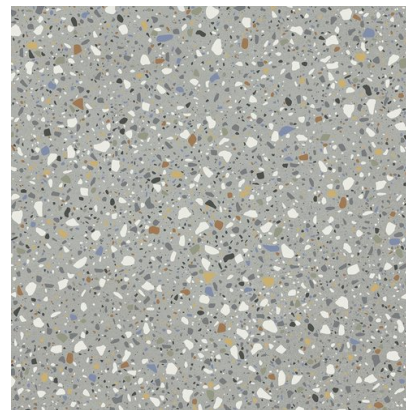

EPOCA GREY POL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038079	60X60	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

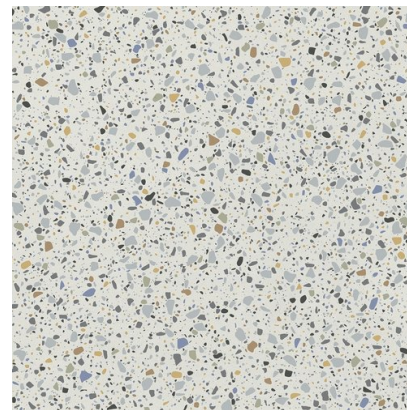

EPOCA WHITE SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037920	60X60	8,80	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (R)	DIN 51130	R9
---------------------	-----------	----



EPOCA BONE SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037921	60X60	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (R)	DIN 51130	R9
---------------------	-----------	----

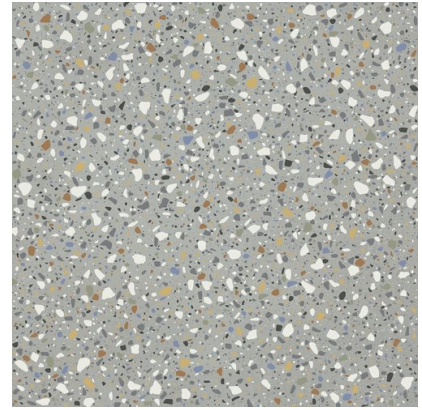

EPOCA GREY SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037922	60X60	9,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (R)	DIN 51130	R9
---------------------	-----------	----

ROD. EPOCA WHITE SILKEN 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038410	7,5x60	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ROD. EPOCA BONE SILKEN 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038411	7,5x60	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ROD. EPOCA GREY SILKEN 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038412	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ROD. EPOCA WHITE POL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038407	7,5x60	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ROD. EPOCA BONE POL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038408	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000

ROD. EPOCA GREY POL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038409	7,5x60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00000000000000000000
---	--------------	------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0.00000000000000000000
Flexion resistance	EN ISO 10545-04	0.00000000000000000000 ²
Thermal shock resistance	EN ISO 10545-09	0.00000000000000000000
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	0.00000000000000000000
Resistance to alkalis	EN ISO 10545-13	0.00000000000000000000
Resistance to cleaning products	EN ISO 10545-13	0.00000000000000000000
Resistance to chemical products in swimming pool water	EN ISO 10545-13	0.00000000000000000000
Stains resistance	EN ISO 10545-14	0.00000000000000000000